


FL4 Solution for side loading, modular, compact and flexible case packer. Designed for high per minute case production, all in a single monoblock.

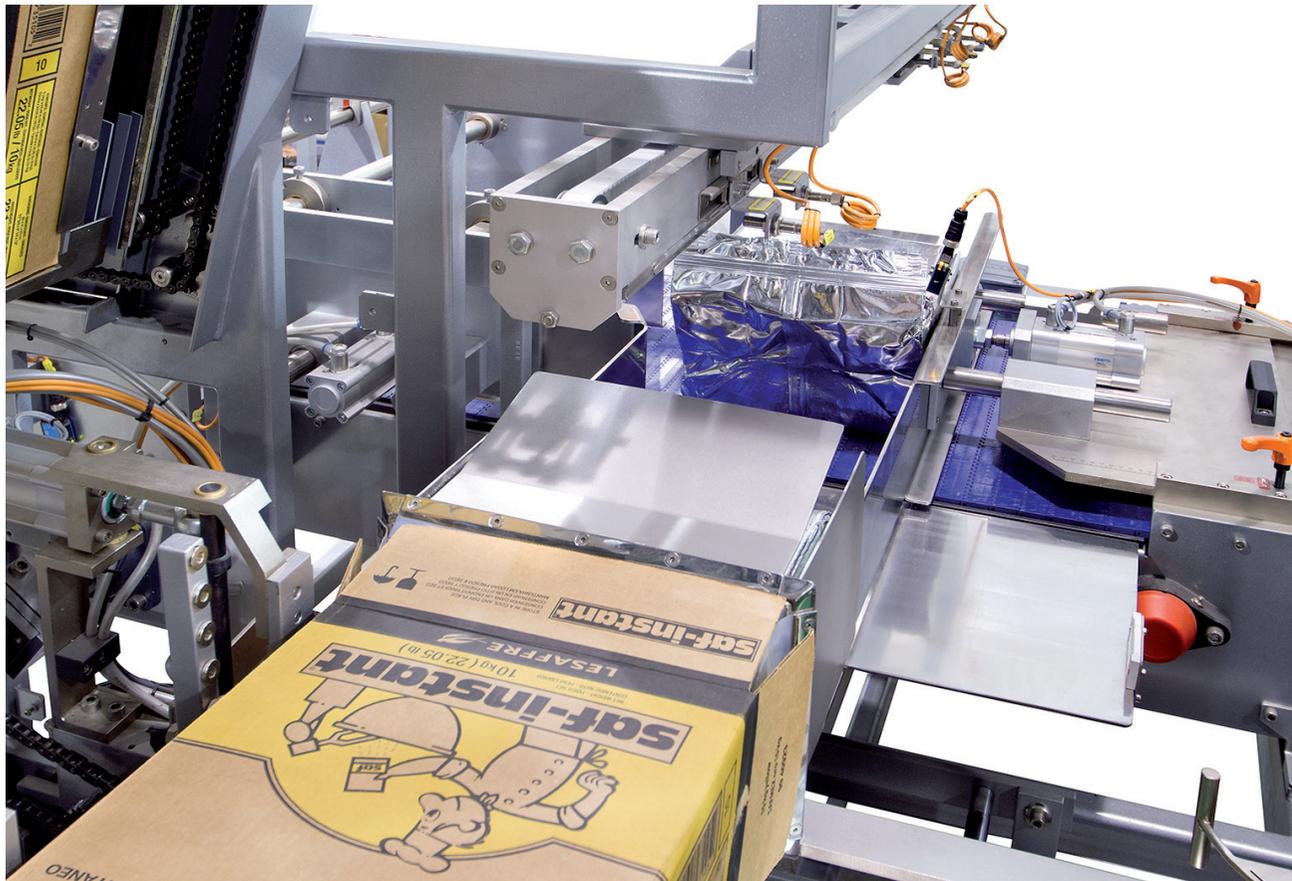

The **FL-4** is a side loading, modular, compact and flexible packer, designed for high per minute case production, all in a single monoblock.

With this generation of packers, the market needs in automating the end of line products whose regular forms are readily manageable at high production volumes are catered to.

Unit for side loading case packer with high speed case erector of four stations allows incorporation of any power system or stacking of containers according to the characteristics of the same.

A renewed highly accessible design for easy operation that supports a variety of possible configurations depending on the type of product specifications and the required production speed.

High performance equipment to work with high standards and excellent production efficiency.

Characteristics

- > 4 loading stations: 2 for forming, filling and closing of cases.
- > Occupies small amount of space.
- > Rapidly changes the mechanical format and stores them in a PLC.
- > No introduction device in the absence of case.
- > Electrical and mechanical protections as per regulations.
- > Designed for high per minute case production
- > Valid for RSC case.
- > Reaches an output of up to 25 cases/minute.

PRODEC
FLEX · TECH

FL4

Solution for side loading, modular, compact and flexible case packer. Designed for high per minute case production, all in a single monoblock.

An accessible and user-friendly design, plan for the grouping of containers, forming, filling and closing of cases in a single compact unit.

Lifting or lowering carriers are available for the rigid or flexible packing of cases and specific power systems for packaging cannot be combined with each other.

Ergonomic case store and large capacity.

The machine incorporates a forced opening of the cases to ensure the correct position at the filling station and transfer to the sealing station.

Closing of cases may be effected by adhesive tape, hot glue application or combination of both systems.

Case magazine

Horizontal case magazine with motorized arm thereof. store length 1000 mm. As the cases are removed from the system, a case presence detector causes the progress of the tape ensuring that the product is always ready for removal. When the store is empty (or there are an insufficient number of cases for smooth operation), the machine is stopped and a visual signal warns the operator of the lack of cases. Optionally you can install an additional detection of the minimum number of cases that must always be present at the store so that the operator can reload before a machine stop.

Shape of case

Extraction of folded cartons using suction cups installed on a semicircular pneumatic arm Forced opening of the case by a suction cup system and a mechanism for side squaring with presence and formation detection of the case.

Dragging of the case

Transporting pre-opened case to the packaging station through a system of drag chains.

Insertion of the case

Combined introducer group using pneumatic pusher, which with the help of a guide of the case flaps installed thereto, ensure transfer process of set of product packs into the case.

Production

The formation unit and closing of cases can reach an output of up to 25 cases/minute and the capacity will depend on the product and the group task to perform.

Man/machine interface

All security or system failure elements, such as accumulation of product on the store conveyor, poorly sealed doors or protections, presence of case, malformed case, lack of air pressure, etc are displayed on a touchscreen built into the control panel for quick location.

PRODEC has brought together in one unit, forming, filling and sealing functions(optional) of cases, with outstanding design features and functionality that are detailed below:

Compact design


All the functions described are developed in a unique monoblockk, occupying a small and simple handling space for the operator. Robust and transparent from any constructive conception angle, it allows one to observe all mechanisms and operational functionality from the outside.

Accessible

The clean, open design without mechanical barriers, greatly simplifies all interventions required on the equipment, whether by a change in format or a simple cleaning and maintenance regulation or routine.

Technical information

Max. Min.	Max	Min.
L	300	160
B	200	110
H	250	110
Speed	25 cases/min	



Flexible

Its advanced concept allows an expansion of its functions to suit the required project needs.

Ergonomics

We have used specific design methods for its development to optimize the comfort and convenience of staff working on the machine.

Information Management

A powerful software developed by our technical team allows you total control over the device functions. You can also perform simple formatting changes through the incorporated touch screen. Through this, it is possible to verify production efficiency for shifts or slots, making it an effective analytical instrument. It is ready to integrate various lines of work according to the standard OMAC.